

Model Number

NBN3-F31K-E8-K

Features

- Direct mounting on standard actuators ٠
- **Fixed setting** ٠
- LED for power on .
- LEDs for switching state of sensor and solenoid valve

Application

Note

The connections to this sensor are sealed with stopping plugs to protect against dirt and moisture. If not all of the connections are used in your application, then seal the remaining stopping plugs on the sensor permanently or check during initial installation and when performing regular maintenance work that the stopping plugs are secure and impermeable. If necessary, tighten the stopping plugs to a torque of 1 Nm.

Accessories	
BT65A	
Activator for F31 series	
T65X	
ctivator for F31 series	
T115A	
tivator for F31 series	
F115X	
ivator for F31 series	
65B	
tivator for F31 series	
F115B tivator for F31 series	
ator for 1 of 1 Series	

Technical Data	
General specifications	
Switching function	
Output type	
Rated operating distance	Sn
Installation	
Output polarity	
Assured operating distance	sa
Actual operating distance	sr
Reduction factor r _{Al}	
Reduction factor r _{Cu}	
Reduction factor r ₃₀₄	
Reduction factor r _{St37}	
Output type	
Nominal ratings	
Operating voltage	UB
Switching frequency	f
Hysteresis	Н
Reverse polarity protection	
Short-circuit protection	
Voltage drop	Ud
Operating current	۱L
Off-state current	l _r
No-load supply current	I ₀
Operating voltage indicator	
Switching state indicator	
Valve status indicator	
Functional safety related paramet	ers
MTTF _d	
Mission Time (T _M)	
Diagnostic Coverage (DC)	
Valve circuit	
Voltage	
Current	
Short-circuit protection	
Reverse polarity protection	
Ambient conditions	
Ambient temperature	
Mechanical specifications	
Connection (system side)	
Core cross-section (system side)	
Connection (valve side)	
Core cross-section (valve side)	
Housing material	
Sensing face	
Degree of protection	
Tightening torque, housing screws	
Tightening torque, cable gland	
Compliance with standards and	
directives	
Standard conformity	
Standards	

Approvals and certificates

••	
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V

2 x normally open (NO) PNP
3 mm
flush mountable
DC
0 2.43 mm
2.7 3.3 mm typ.
0.5
0.4
1
1.2
4-wire
10 30 V DC
0 500 Hz
typ. 5 %
all connections
pulsing
≤3V
0 100 mA
0 0.5 mA typ. 0.1 μA
≤ 25 mA
LED, green
LED, yellow
LED, yellow
,,,
780 a
20 a
0%
max. 32 V DC
max. 240 mA
no
yes, with reversed output LED is out of function, therfore more
power for solenoid valve
25 70 °C (12 159 °E)
-25 70 °C (-13 158 °F)
Cage tension spring terminals
1.5/2.5 mm ² flexible/rigid
Cage tension spring terminals
1.5/2.5 mm ² flexible/rigid
PBT
PBT
IP67 1 Nm
M20 x 1.5; \leq 7 Nm M12 x 1.5; \leq 2 Nm
M12 x 1.5 ; ≤ 3 Nm
EN 60947-5-2:2007
EN 60947-5-2/2007 EN 60947-5-2/A1:2012
IEC 60947-5-2:2007
IEC 60947-5-2.2007 IEC 60947-5-2 AMD 1:2012
all us listed. Consul Durness

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group

www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111 fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

EPPPERL+FUCHS


1

NBN3-F31K-E8-K

Dimensions

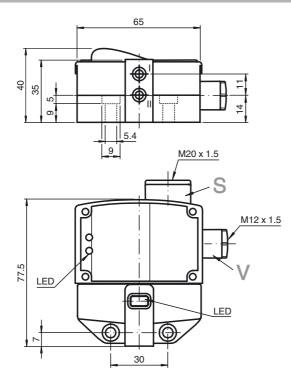

Electrical Connection



2

EPEPPERL+FUCHS